


BX-35ZBS Outdoor Bell Box

High Quality Bell Box with Effective Visual and Audible Alerts

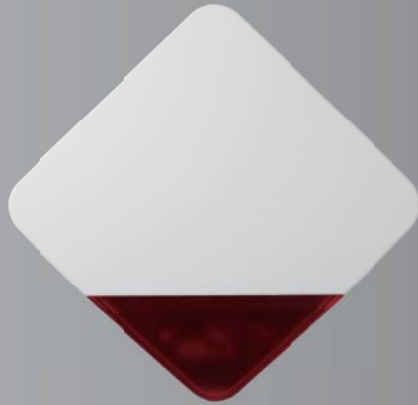

- Siren output level is 106dB at 1 meter
- Elegant, modern design
- Wireless, lightweight, easy to install

BX-35ZBS bell box is a battery-operated wireless outdoor siren generating a loud 106 decibel siren sound and strobe lights during an alarm to provide visible and audible alerts. Encased in a durable, IPX5 waterproof design, easy-to-install BX-35ZBS is a premium choice for the modern smart home.

The BX-35ZBS is energy saving and environmentally conscious, requiring only two Alkaline batteries, yet still has a long battery life. The BX-35ZBS generates unique alarm sounds for fire and burglary to inform users of the type of danger at hand.

In addition to producing audible and visible warnings in the case of emergency, the BX-35ZBS emits beep notifications for arming and disarming of a security system, and of its low battery status. Its tamper-deterrent feature protects against unauthorized removal and sabotage. The BX-35ZBS is compatible with other manufacturers' ZigBee systems and can be integrated into new or existing ZigBee systems.

Features

- Siren output level is 106dB at 1 meter
- Unique alarm sounds for fire and burglary
- Lightweight and flexible to install
- Modern and Elegant design
- Programmable siren duration of 3/5/10 minutes
- Sound notifications of arming, disarming, and low battery status
- Regular supervision signals to check system integrity and trouble shooting
- Low battery detection
- Tamper protection prevents unauthorized removal
- IPX5 waterproof and UV resistant housing
- Compliant with CE requirement
- Compatible with other's ZigBee manufacturers' ZigBee systems

Specifications

Communication Protocol	ZigBee Pro Home Automation 1.2
Frequency	2.4GHz
Power Supply	1.5V, D Alkaline battery x 2
Battery Life	6 years*
Siren Output	106dB at 1 meter
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	223 x 223 x 68mm