

Protecting your loved ones




- **VoLTE Supported**
- **Remote Programming & Local PC Programming Software**
- **Voice Prompt Update via OTA**
- **AT&T / Verizon / T-Mobile Supported**

CTC-1052-QT-DT35A LTE Medical Alarm System supports VoLTE (voice over LTE), offering better quality of voice communication and calling experience. CTC-1052-QT-DT35A features a new case design, with volume adjustment buttons and a white bar to indicate the cellular signal strength. In addition, CTC-1052-QT-DT-35A can be programmed via remote programming or local PC programming, providing intuitive graphical interface for installers to program the panel easily.

CTC-1052-QT-DT35A comes with a user-friendly voice prompt feature for learn-in sensor instructions, emergency events, and power/inactivity status. The step-by-step instructional voice prompt further simplifies the sensor learning procedure, making learning in a new emergency pendant quick and easy. Besides, the voice prompt can be updated via OTA.

CTC-1052-QT-DT35A is incredibly easy to integrate into users' daily lives, giving users and their loved ones the assurance that help is just a call and a button push away.

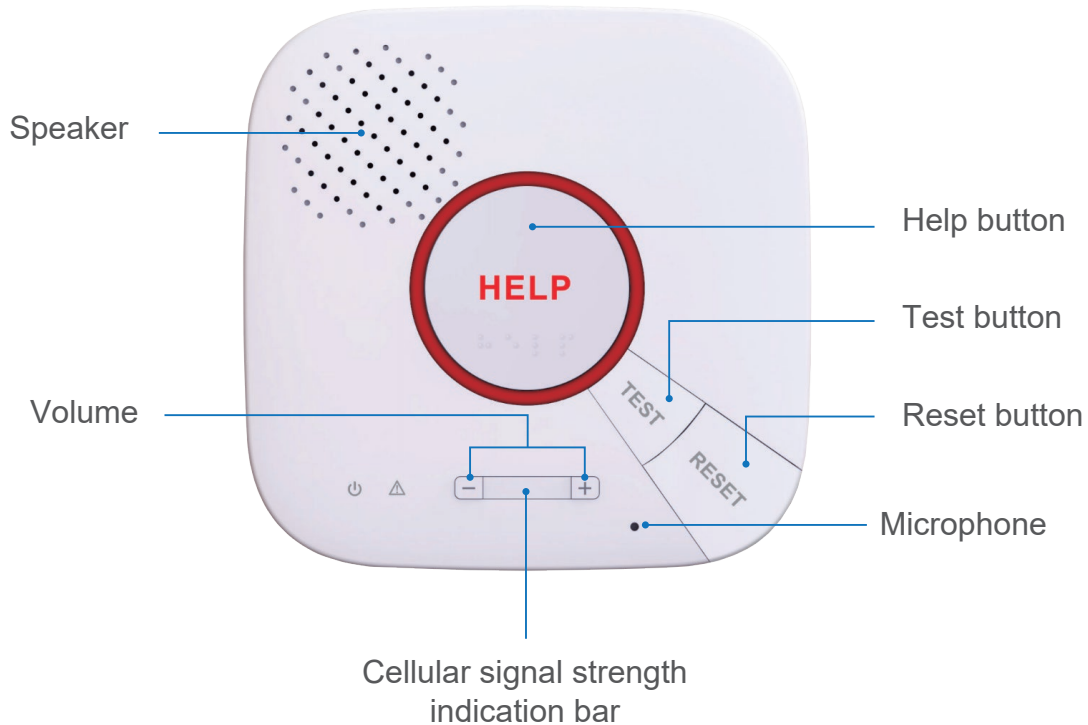

Features

- LTE Medical Alarm Panel
- VoLTE (voice over LTE)
- Remote programming & Local PC programming software
- AT&T / Verizon / T-Mobile supported
- Voice prompt update via OTA
- Voice Prompts: learn-in sensor instructions, emergency events, power/inactivity timer status
- Compatible with medication dispenser
- Alarm Reporting via GPRS, SMS, or Speech
- Two-way hands-free voice communication
- Integrate multiple devices/sensors: Wrist Transmitter, Emergency Pendant, Fall Sensor, PIR Motion Sensor, Panic Button, Smoke Detector, Water Leakage Sensor, and CO Sensor, etc.
- Test button for easy access to trigger test report
- Long communication range
- Silent emergency call
- Supervision for emergency pendants
- Mobility Check, Automatic Check-in report, "Help Arrived" Confirmation, Fault Reporting
- Backup Battery in case of power failure

Specifications

CTC-1052-QT-DT-35A

Frequency	F1 919 MHz / F1 869 MHz
LTE Frequency	EU: B1 (2100MHz) / B3 (1800MHz) / B7 (2600MHz) / B8 (900MHz) / B20 (800MHz) / B28 (700MHz) US: B2 (1900MHz) / B4 (1700MHz) / B5 (850MHz) / B12 (700MHz) / B13 (700MHz)
3G Frequency	EU: B1 (2100MHz) / B8 (900MHz) US: B2 (1900MHz) / B4 (1700MHz) / B5 (850MHz)
Power Source	12V/1A Power Adaptor
Backup Battery	7.2V, 600mAh Ni-MH Rechargeable Battery Pack
Battery Life	10 hours*
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	156 mm x 156 mm x 47 mm

*Note: Actual battery life varies with settings, conditions, operating environment, and usage.