

# ***Climax Medical Series***

***Protecting your loved ones***



***A Complete Smart Care Solution***

# Contents

---

Climax Medical Series Introduction	1
Senior Care Series	2
Smart Care Series	4
GX Cubic 2 Medical Alarm Solution with Voice Recognition	6
GX Cubic 3 Medical Alarm Solution with Voice Recognition	7
PERS GPS Locator Series	8
GPS Locator Tracker & Locator System	9
Voice Recognition Emergency Alarm & Communicator	10
Emergency 2-Way Voice Communicator	11
Accessories - Emergency Pendants & Wrist Transmitter	12
Accessories - Panic Button	14
Accessories - Pad/Door Transmitter & More	15

# Climax Medical Series

Protecting your loved ones




Climax's Medical Series are an all-in-one wellness, security and personal safety medical alarm solution, designed for seniors to stay safe and independent at home or outdoors. Our Senior Care series, Smart Care series, PERS GPS location tracking series, and accessories product family offers a comprehensive range delivering features, including senior care, home security, emergency monitoring, energy management, lifestyle monitoring, home automation, and visual verification monitoring. Our Medical Series solutions are seniors most trusted companion for a worry-free lifestyle, making active aging as easy as a breeze.

## Multiple Communication Paths & Protocols

Smart Care Series have multiple communication options: IP (Ethernet), WiFi, and/or 3G/LTE connectivity. Smart Care panels also support multiple protocols including RF, ZigBee, Z-Wave, Bluetooth (BLE) and/or DECT protocols, supporting up to 100 wireless sensor devices, creating comprehensive and endless expandability, assisting seniors to build a healthier, safer independent living.


## Bluetooth (BLE) Pairing Capability

Smart Care Series are compatible with Bluetooth Low Energy (BLE) medical devices, like blood glucose monitors, pulse oximeters, heart rate monitors...etc, to track health and medical data and provide alerts when necessary, creating a customized solution to meet individual needs.

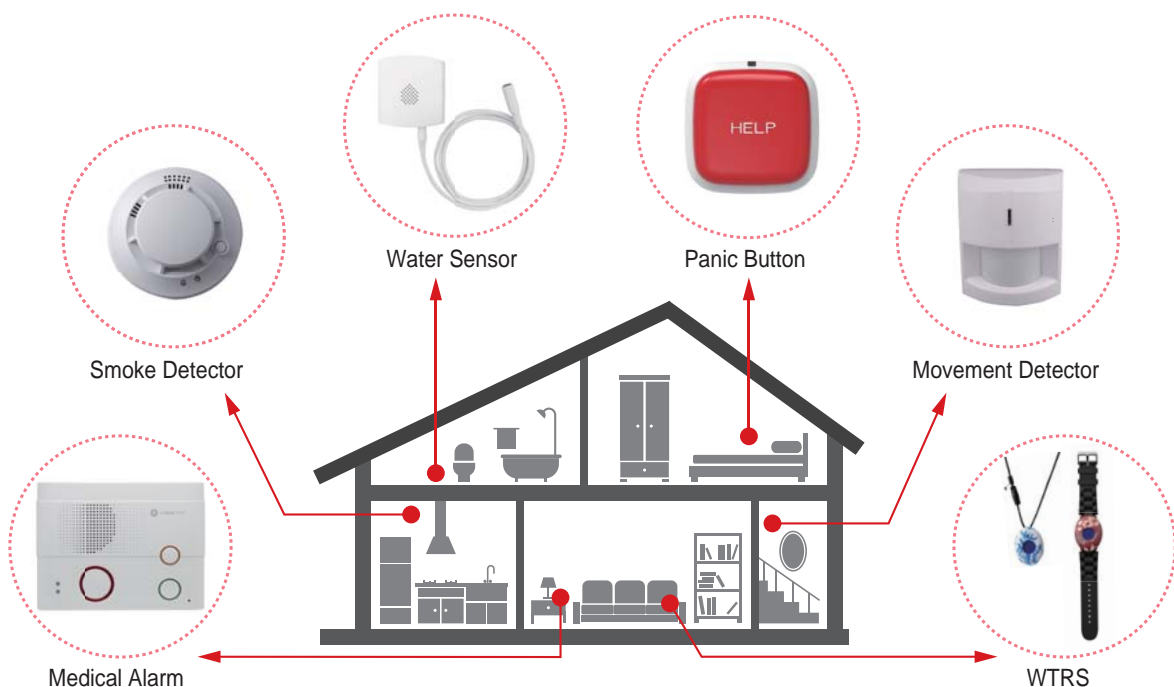

### Senior Care - PSTN Medical Alarm Series

Climax's Senior Care solution provides an ideal protection for seniors at home. In an emergency event, you can summon immediate help with a simple one button press. Moreover, with additional functionalities such as fall detection, mobility checks, two-way voice communication via optional sensors, our Senior Care series will be your most reliable partner for a carefree and dignified aging.

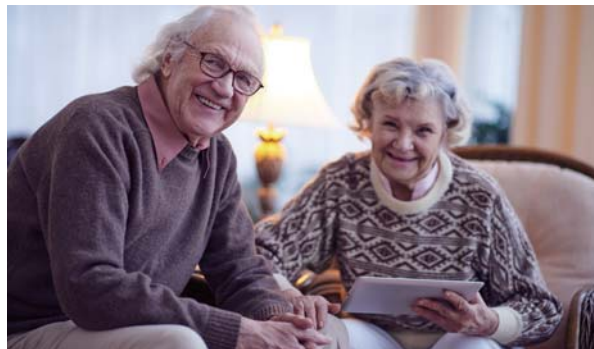

#### CTC-1032/ CTC-1039

- PSTN medical alarm
- CID reporting
- Reports up to 4 Central Monitoring Stations
- Two-way voice communication
- Voice Reporting (CTC-1039 only)
- Voice Prompts (CTC-1032v18 only)
- Remote & Local Programming
- Hands free call answering
- Silent emergency call
- Supervision for wrist pendants
- Mobility check
- Automatic check-in report



#### CTC-1041/ CTC-1041RV

- PSTN medical alarm
- CID reporting
- Reports up to 4 Central Monitoring Stations
- Works with Climax DECT devices (CTC-1041RV only)
- Voice Prompts (CTC-1041v18 only)
- Powerful 3W speaker
- Two-way voice communication
- Remote & Local programming
- Hands free call answering
- Silent emergency call
- Supervision for wrist pendants
- Mobility check
- Automatic check-in report

Power Source	12V, 1A Switching Power
Backup Battery Type	Ni-Mh Battery
Backup Battery Life	19 hrs
Frequency	433MHz/ 869MHz
Operating Temperature	-10°C to 45°C
Operating Humidity	Up to 85% non - condensing
Dimensions	180mm x 122mm x 40mm

Power Source	12V, 1A Switching Power
Backup Battery Type	Ni-Mh Battery
Backup Battery Life	34hrs/ 13hrs (CTC-1041RV)
Frequency	433MHz / 869MHz
Operating Temperature	-10°C to 45°C
Operating Humidity	Up to 85% non-condensing
Dimensions	200mm x 150mm x 55mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

## Senior Care - 3G/LTE Medical Alarm Series

### CTC-1052/CTC-1052RV /CTC-1052L



- 3G/LTE Medical Alarm Panel
- CID/GPRS/SMS/Speech Reporting
- Reports up to 4 Central Monitoring Stations
- Works with Climax DECT devices (CTC-1052RV only)
- Voice Prompt: Learn-in sensor setup, emergency events and status (CTC-1052L only)
- Two-Way Hands-Free Voice Communication
- Long Communication Range
- Remote & Local programming
- Silent emergency call
- Supervision for Emergency Pendants
- Automatic check-in report, Mobility check

### CTC-1052B/CTC-1052B Plus



- 3G Medical Alarm Panel
- Volume Control Buttons
- Temperature Alarm Reporting (CTC-1052B Plus only)
- CID/GPRS/SMS/Speech Reporting
- Reports up to 4 Central Monitoring Stations
- Voice Prompt
- Two-Way Hands-Free Voice Communication
- Remote & Local programming
- Silent emergency call with Half Duplex Listen-in
- Supervision for Wrist Pendants
- Mobility check, Fault Reporting, Automatic check-in report

### CTC-1052C



- 3G Medical Alarm Panel
- LCD Display shows clock time, GSM signal strength, temperature, and volume
- CID/GPRS/SMS/Speech Reporting
- Reports up to 4 Central Monitoring Stations
- Voice Prompt
- Two-Way Hands-Free Voice Communication
- Remote & Local programming
- Silent emergency call with Half Duplex Listen-in
- Supervision for Wrist Pendants
- Mobility check, Fault Reporting, Automatic check-in report

### Smart Care Series - MX Medical and Intrusion Alarm Solution



With our Smart Care MX Series, a personal safety medical alarm system and intrusion alarm system, seniors will receive a robust reliable medical alarm services and enjoy the peace-of-mind resulted from the systems convenient and efficient security functions.



#### MX Series



- Communication Path Options: PSTN, IP (Ethernet), 3G, LTE
- Built-in Module Options: RF, DECT
- Communication protocols with Monitoring Centers: Contact ID, SIA, Social Care Alarm Internet Protocol (SCAIP)
- Alarm Reporting via PSTN or 3G / LTE
- World-class certified RF range and two-way voice quality
- Supports multiple reporting methods including speech mode
- Voice prompts feature
- Integration up to 100 sensors/devices
- 24/7 Environment Emergency Monitoring
- Multi-party emergency intercom system
- Comprehensive Help/Nurse Arrival function
- Doubles as an intrusion alarm
- Adjustable speaker and microphone volume
- Certifications: EN50131 Grade 2, Class II

RF Frequencies	433MHz / 869MHz
3G Frequencies	900 / 1800 / 2100MHz
LTE Frequencies	800 / 900 / 1800 / 2100 / 2600MHz
Power Supply	12V @ 1A
Backup Battery	7.2V, 1600mAh, Ni-Mh Rechargeable battery pack
Backup Battery Life	24hrs*
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	110mm x 91mm x 28mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

## Smart Care Series - GX Medical Alarm Solution

The GX is an all-in-one wellness, and personal safety medical alarm solution with Bluetooth (BLE) medical devices pairing, VOIP two-way communication, advanced home automation via ZigBee & Z-Wave, voice control (via HPS), emergency monitoring, and visual verification, allowing seniors to build a healthier, safer independent lifestyle.



### GX Series



- Communication Path Options: IP (Ethernet), LTE
- Built-in Module Options: RF, ZigBee, BLE, DECT
- Optional Expansion via USB Dongle: WiFi, Z-Wave
- Communication protocols with Monitoring Centers: Contact ID, SIA, Social Care Alarm Internet Protocol (SCAIP)
- Voice over Internet Protocol (VoIP) capabilities
- Alarm Reporting
- Compatible with Bluetooth Low Energy (BLE) medical devices
- Supports Pivottell® 'Advance' Pill Dispenser integration
- ZigBee & Z-Wave compatible home automation features
- 24/7 Environment Emergency Monitoring
- Energy Management features
- Multi-party emergency intercom system capability
- Voice Prompt feature
- Automatic check-in reports and remote firmware update capabilities

RF Frequencies	433MHz / 869MHz
ZigBee Protocol	ZigBee Pro HA 1.2, 2.4GHz
Z-Wave Protocol	Z-Wave Plus 500 Series Module, 868.40MHz (EU) / 908.40MHz (US)
3G Frequencies	900 / 1800 / 2100MHz
LTE Frequencies	800 / 900 / 1800 / 2100 / 2600MHz
Bluetooth Low Energy (BLE)	2.4GHz
WiFi Module	802.11 b/g/n
Power Supply	12V @ 1.5A
Backup Battery	7.2V, 1600mAh, Ni-Mh Rechargeable battery pack; or 7.2V, 2300mAh Ni-Mh Rechargeable battery pack; or 7.2V, 4500mAh Ni-MH Rechargeable battery pack
Backup Battery Life	18hrs* (1600mAh); 24hrs* (2300mAh); 40hrs* (4500mAh)
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	130mm x 61mm x 48mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

### GX-Cubic2 Medical Alarm Solution with Voice Recognition



GX Cubic2

GX Smart Care Medical Alarm is a breakthrough voice recognition medical alarm solution, activating emergency call by vocal command. GX Cubic2 also bridges medical health monitoring and traditional personal safety medical alarm for seniors to stay safe indoors and outdoors. GX Cubic2 LCD display shows GSM signal strength, clock time, temperature, and sensor faults to keep users informed at all times.



Voice Activation



Home Automation



Location Tracking



Senior Care



- Communication Path Options: IP (Ethernet), LTE
- Built-in Module: RF, DECT
- Protocol Module Options: Zigbee, Z-Wave, Bluetooth
- Supports multiple communication protocols with Monitoring Centers for Alarm Reporting
- LCD Display: Clock, Temperature, GSM Signal Strength, and Sensor Faults
- Supports Pivotell® ‘Advance’ Pill Dispenser integration
- ZigBee or Z-Wave compatible home automation capabilities
- Compatible with Amazon Alexa & Google Home voice control
- Energy Management capabilities
- Activate emergency calls by vocal commands “Help Me”
- Voice over Internet Protocol (VoIP) capabilities
- Compatible with Bluetooth Low Energy (BLE) medical devices
- World-class certified RF range, reliability, and performance
- Integrate up to 100 sensors/devices
- Voice Prompt alerts users
- 24/7 Environment Emergency Monitoring
- Multi-party emergency intercom system capability
- Supports multiple programming methods
- Remote firmware update capability

RF Frequencies	F1 433MHz / F1 869MHz / F1 919MHz
ZigBee Protocol	ZigBee Pro HA 1.2, 2.4GHz
Z-Wave Protocol	Z-Wave Plus 500 Series, 868.40MHz (EU) / 908.40MHz (US)
LTE Frequencies	800 / 900 / 1800 / 2100 / 2600MHz
WiFi Module	802.11 b/g/n
Power Supply	12V @ 1.5A
Backup Battery	2300mAh Ni-mH rechargeable battery pack
Backup Battery Life	18 hrs*
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	110mm x 110mm x 160mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.



## GX-Cubic3 Medical Alarm Solution with Voice Recognition



**GX Cubic3**

GX Smart Care Medical Alarm is a breakthrough voice recognition medical alarm solution, activating emergency call by vocal command and bridging medical health monitoring and traditional personal safety medical alarm to keep seniors safe and comfortable in their own homes.



Voice Activation



Home Automation



Location Tracking



Senior Care



- Communication Path Options: IP (Ethernet), LTE
- Built-in Module: RF, DECT
- Protocol Module Options: Zigbee, Z-Wave, Bluetooth
- Supports multiple communication protocols with Monitoring Centers for Alarm Reporting
- Supports Pivottell® 'Advance' Pill Dispenser integration
- ZigBee or Z-Wave compatible home automation capabilities
- Compatible with Amazon Alexa & Google Home voice control
- Energy Management capabilities
- Voice over Internet Protocol (VoIP) capabilities
- Activate emergency calls by vocal commands "Help Me"
- Compatible with Bluetooth Low Energy (BLE) medical devices
- World-class certified RF range, reliability, and performance
- Integrate up to 100 sensors/devices
- Voice Prompt alerts users
- 24/7 Environment Emergency Monitoring
- Multi-party emergency intercom system capability
- Supports multiple programming methods
- Remote firmware update capability

RF Frequencies	F1 433MHz / F1 869MHz / F1 919MHz
ZigBee Protocol	ZigBee Pro HA 1.2, 2.4GHz
Z-Wave Protocol	Z-Wave Plus 500 Series, 868.40MHz (EU) / 908.40MHz (US)
LTE Frequencies	800 / 900 / 1800 / 2100 / 2600MHz
WiFi Module	802.11 b/g/n
Power Supply	12V @ 1.5A
Backup Battery	7.2V, 1600mAh Ni-MH rechargeable battery pack or 2300mAh Ni-MH rechargeable battery pack
Backup Battery Life	18 hrs* (1600mAh) or 24hrs* (2300mAh)
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	110mm x 110mm x 144mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

### PERS GPS Location Tracker - Mobile Lite & Mobile Pro

Climax’s Mobile Lite, a 3G/LTE personal emergency response system (PERS) with GPS location tracking functionality, protects seniors at home, in the yard, and outdoors.

#### Mobile Lite



- LTE GPS Location Tracker for both indoor & outdoor protection
- CID/GPS/SMS/Speech reporting
- Up to four numbers can be saved for emergency calls
- Location coordinates viewable on smartphone app & web browser
- Integrate up to 5 emergency pendants & wrist transmitters
- Voice prompt
- Lightweight & Portable with raised button bumps for easy access
- Geofence alerts when user leaves defined safe area (optional)
- Remote programming & Automatic check-in report

Frequencies	433MHz / 869MHz (EN-300-220, Class 1)
Power Supply	3.7V, 800mAh, Rechargeable battery pack
Battery Life	48 hrs*
PS Data Rate	3G: HSUPA category 6; HUSPA category 8 LTE: LTE category 1
SIM Card	Supports 1.8V and 3V micro SIM card
Water Resistance	IPX4
Dimensions	41mm x 23mm x 71mm

#### Mobile Pro



- LTE PERS GPS Location Tracker for indoor & outdoor protection
- CID/GPS/SMS/Speech reporting
- Voice prompt
- Two-way hands-free communications feature
- Ten selectable volume level settings
- Location coordinates viewable on smartphone app & web browser
- Large Help button with LED backlight
- Integrate up to 5 emergency pendants & wrist transmitters
- Up to four numbers can be saved for emergency calls
- Remote & Local programming & Automatic check-in report

Mobile Pro I - Base		Mobile Pro I – Mobile Lite	
Frequency	433MHz / 869MHz (EN-300-220, class 1)	Frequency	433MHz / 869MHz (EN-300-220, class 1)
Power Source	9V, 1A Adaptor	Power Source	3.7V, 800mAh Lithium rechargeable battery
Backup Battery	1100mAh, Ni-Mh rechargeable battery pack	Battery life	48hrs*
Backup Battery Life	30hrs*	SIM Card	Supports 1.8V and 3V micro SIM cards
Volume	Up & Down Buttons, 10 level control	Water Resistance	IPX4
Dimensions	162mm x 165mm x 62mm	Dimensions	41mm x 23mm x 71mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

## Locator System

### PWSR Patient Wandering System Receiver



- Monitor, Track & Protect Residents and Patients
- Supervise patient's pendant signaling device or guard perimeter exits
- Raises alarm and notification when patient wanders off
- Multiple installation options & multiple pendant options
- Suitable for Senior Care Centers, Nursing Homes & Hospitals
- Frequencies: 433MHz / 869MHz
- Power Supply: Power over Ethernet (POE)
- Dimensions: 186mm x 130mm x 30mm



GPT-3-FS

- Emergency Panic Alarm Pendant
- Alerts when patient moves outside of pre-set location
- Built-in accelerometer for movement
- IP45 Waterproof standard
- Wireless, small, and lightweight
- Power Source: 3V, CR2477 Lithium battery x1
- Battery Life: 2 years\*
- Dimensions: 58mm x 42mm x 19mm



GPT3-WTRSB

- Emergency Panic Alarm Wrist Transmitter
- Alerts when patient moves outside of pre-set location
- IPX8 Waterproof standard
- Worn as a necklace pendant or wrist transmitter
- Low battery detection & Supervision
- Power Source: 3V, CR2450 Lithium battery x1
- Battery Life: 1 year\*
- Dimensions: 44mm x 40mm x 13mm

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

## GPS Location Tracker - Bluetooth Smart Pendant



Bluetooth Smart Pendant  
for Mobile Tracking

- BRPD-1 Bluetooth Smart Pendant, a small wearable panic button that partners with a smartphone application for GPS location reporting and trigger help alarm.
- Location coordinates viewable on smartphone app & web browser
- Pairs with GX Medical Solution Series only
- RF Frequencies: 868MHz / 433MHz / 869MHz
- Power Supply: 3V, CR2477 Lithium battery x 1
- Battery Life: 2 years\*
- Dimensions: 59mm x 42mm x 19mm

# Climax Medical Series

Protecting your loved ones

## BR1-WTRSB



- Bluetooth Emergency Pendant reports an alarm & GPS location via smartphone app when pressed
- IPX8 Waterproof standard
- Worn as a necklace pendant or wrist transmitter
- RF Frequencies: 868MHz / 433MHz
- Power Supply: 3V, CR2450 Lithium battery x1
- Battery Life: 3.8 years
- Dimensions: 44mm x 40mm x 13mm

## Voice Recognition Emergency Alarms & Communicator

### VRA



- Emergency alarm with voice recognition
- Voice-triggered activation and keyword/command
- Large manual button to trigger help alarm
- Wall-mount or table-top placement
- Power Supply: 5V, 1A adapter
- Battery: 3V, E93 C-Type Alkaline batteries x2
- Battery Life: 1 year\*

### VRCP-WiFi



- Voice Call Point activates emergency call by preset vocal commands, keywords, or button press
- High-clairty, hands-free, two-way communication via WiFi
- Excellent voice quality and long communication range
- Power Supply: 5V, 1A adapter

### VRCP-DECT



- Voice Extender allows user to summon emergency help with voice recognition command or a single button press
- Two-way Hands-free voice communication via DECT
- Excellent voice quality and long range
- Wall-mount or table-top placement
- Power Supply: 9V, 1A adapter
- Backup Battery: 600mAh, Ni-Mh Rechargeable battery pack
- Backup Battery Life: 18hrs\*

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

## Emergency 2-Way Voice Communicator

### VCP-WiFi-R3



- Emergency Voice Call Point with WiFi capability
- High-clairty, hands-free, two-way communication via WiFi
- Excellent voice quality and long communication range
- Automatically picks up incoming call without button press
- Backup battery (VCP-WiFi-R3B only)
- Power Supply: 5V, 1A adapter

### VCP-DECT



- Emergency Communicator with one button press
- Two-way Hands-free voice communication via DECT
- Excellent voice quality and long range
- RF technology equipped (VCP-DECT-R8 only)
- Wall-mount or table-top placement
- Power Supply: 9V, 1A adapter
- Backup Battery: 600mAh, Ni-Mh Rechargeable battery pack
- Backup Battery Life: 18 days\*

### CTC-808RV



- Voice Extender allows user to summon emergency help
- Two-way Hands-free voice communication
- Can be used by multiple persons simultaneously
- Adjustable speaker volume
- Power Supply: 9V, 1A adapter
- Backup Battery: 1.5V, LR14/C Alkaline battery x4
- Backup battery life: 6 days\*

### Call Point



- Wireless two-way voice emergency communicator
- Two-way, hands-free voice communication
- Built-in microphone and speaker
- Excellent voice quality and long reach
- IPX4 waterproof standard
- Low battery indicators
- Ultra low power consumption
- Power Source: 1.5V, AA Lithium battery x2; Battery Life: 4 years\*

### Talking Pendant



- Two-way Hands-free voice communication
- IP67 waterproof standard
- Fall Detection Feature (WTRVS-8-FS & WTRVS-15-FS only)
- Equipped with RF Technology (WTRVS-15 only)
- Built-in microphone and speaker
- Portable, worn as neck pendant
- Low battery indicators
- Power Source: 3V, CR123 Lithium battery x1; Battery Life: 2.5 years\*

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

### Medical Accessories - Emergency Pendants & Wrist Transmitter

JLPD-1



- Chic personal emergency pendant jewelry
- IPX8 waterproof standard
- Extensive RF Range (dependent upon frequency)
- Multiple color options of Burgundy Red, Jade Green, or Marble
- Low battery detection and supervision
- Lightweight & Comfortable design
- Long battery life of up to 10 years\*

CW-1



- Stylish personal emergency pendant watch
- Alerts when button pressed
- Reliable signal transmission
- Low battery detection & supervision
- Multiple wristband options
- Power Source: 3V, CR2016 Lithium battery x1
- Battery Life: 3 years\* (F1 869MHz); 2 years\* (869MHz)

WTRS2



- One-of-a-kind, easy to use, stylish emergency pendant
- One-Click Necklace/Wristband Switch
- IP68 waterproof standard
- Multiple color options: White, Blue China, Watch
- Low battery detection and supervision
- Multiple necklace/wristband options: black lanyard, black wristband, white wristband, or black elastic wrist strap
- Long battery life of up to 9 years\*

WTRS



- One-of-a-kind, easy to use, stylish emergency pendant
- One-Click Necklace/Wristband Switch
- IP67 waterproof standard
- Multiple color options: White, Blue China, Flag, Flower designs
- Low battery detection and supervision
- Multiple necklace/wristband options: black lanyard, black wristband, white wristband, or black elastic wrist strap
- Long battery life of up to 6 years\*

### Medical Accessories - Emergency Pendants & Wrist Transmitter

#### Fall Sensor Pendant



- Raises alarm calls when a fall is detected
- Worn as a neck pendant
- IP45 Waterproof standard
- Low battery detection & Supervision
- Long battery life of up to 2 years\*

#### WTRZ



- Can be worn as a neck pendant or a wrist transmitter
- Handicap raised color cover for easier accessibility
- Fully waterproof and lightweight
- Interchangeable color covers to match individual styles
- Multiple options of necklace/wristband including black lanyard and black elastic wrist strap
- Long battery life of up to 6 years\*

#### WTRQ



- Worn as a neck pendant or a wrist transmitter
- Raised bumps on button for easier accessibility
- IPX8 Waterproof standard
- Low battery detection and supervision
- Multiple Necklace/Wristband options: black elastic wrist strap, velcro wrist strap, colored plastic wristband, black lanyard, or stainless steel chain
- Long battery life of up to 9 years\* and more (depend on frequency)

#### WTRD



- Emergency Necklace Pendant
- IP67 Waterproof standard
- Low battery detection & Supervision
- Multiple Necklace options: gray or black lanyard, stainless steel chain
- Long battery life of up to 5 years\*

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.

### Medical Accessories - Panic Button

#### Panic Button



- Big red HELP button for quick identification and activation
- LED indicates the transmission of alarm signals
- IPX4 water resistant standard
- Periodic supervisory signals check system integrity
- Dimensions: 85mm x 85mm x 22mm
- Low battery indicator
- Long battery life of up to 8 years\*

#### Panic Button



- Red round button for quick identification and activation
- LED indicates the transmission of alarm signals
- IPX4 water resistant standard
- Periodic supervisory signals check system integrity
- Low battery indicator
- Long battery life of up to 6 years\*

#### Pull Cord



- Summon help by pulling the attached cord
- Wall-mount or ceiling-mount indoor installation
- Low maintenance
- 24-hr supervision transmissions
- Low battery detection
- Long battery life of up to 5 years\* and more (depend on frequency)

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.



## **Medical Accessories - Pad/Door Transmitters & More**

### **Sensor Pad Transmitter**



- Compatible with bed, chair, and floor mat sensor systems
- Detects when patient gets up from bed/chair pad, or steps on floor mat
- Connection Type: standard handset jack (RJ-9)
- Dip switch for bed/chair pad or fall mat mode
- Wireless, Tamper protected & Supervision
- Long battery life of up to 3 years\*

### **Sensor Pad Door Contact**



- Monitors opening/closing of door and activations of floor pressure mat
- Compact and slim design for easy mounting on door frame
- Extension terminal for connection to a floor pressure mat
- Randomized supervision signals to check system integrity
- Tamper protection to prevent unauthorized removal or sabotage
- Low battery detection
- Long battery life of up to 10 years\*

### **Stove Guard Emergency Transmitter**



- Remotely monitor connected Innohome Stove Guard SGK510 activation
- Input jack for easy plug-and-play deployment
- Compact and slim design for easy mounting
- Randomized supervision signals to check system integrity
- Tamper protection to prevent unauthorized removal or sabotage
- Low battery detection
- Long battery life of up to 10 years\*

\*Note: Actual battery life may vary with product settings, usage patterns and operating environment.







**Climax Technology Co., Ltd.**  
Website: <http://www.climax.com.tw>  
Email: [sales@climax.com.tw](mailto:sales@climax.com.tw)

Copyright © 2020 Climax Technology Co., Ltd. All Rights Reserved.  
FEB. 5, 2020