


HWC-1 Hardwire to Wireless Converter Series

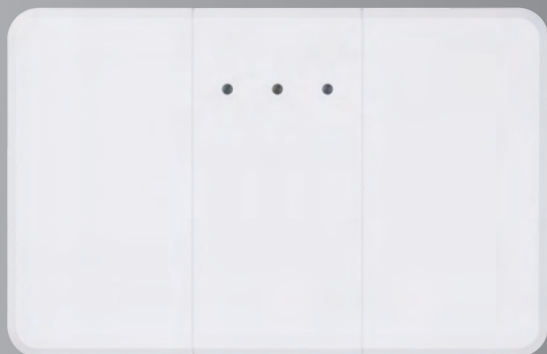

- Converts 9 hardwired zones to wireless technology
- Ideal for retrofitting existing wired security systems
- Compact and lightweight for easy installation

The HWC-1 hardwire to wireless converter is designed to convert existing wired security sensors to wireless zones, enabling retrofitting of traditional wired security systems. Converting existing wired sensors saves on installation cost, time and materials since there is no need to replace wired devices with individual transmitters and provides homes and businesses with increased convenience and efficient functionality for users.

The HWC-1 will convert a total of 9 wired zones and convert them into 9 wireless zones. The wireless compact module can be mounted next to the security system control panel, allowing for convenient placement and easy installation. It can power existing hardwired PIR motion sensors, door contacts, glassbreak sensors and other 12V security sensors, providing ultimate flexibility and expandability. Not for use with fire or heat sensors. The HWC-1 is ideal for upgrading current hardwired systems or used in new construction installations that have been fitted with hardwired systems.

Features

- Converts 9 hardwired zones to wireless technology
- Compact and lightweight for easy installation
- Excellent stability with high sensitivity
- 4-pin terminal block for power supply
- 14-pin terminal block for 9 zones
- Tamper protection
- Converts existing hardwired PIR, door contacts, glassbreak sensors, and other 12V security sensors.
- Rechargeable Backup Battery (HWC-1B only)
- Low battery notification (HWC-1B only)
- Regular supervision signals to check system integrity
- Ideal for retrofitting existing wired security systems
- EN50131 Grade 2, Class II certified

Specifications

HWC-1 Hardwire to Wireless Converter

RF Frequencies	433MHz / 869MHz / 868MHz
Power Supply	12V, 1A Power Adapter
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	105mm x 163mm x 30mm

HWC-1 Hardwire to Wireless Converter Series

Specifications

HWC-1B Hardwire to Wireless Converter with backup battery

RF Frequencies	433MHz / 869MHz / 868MHz
Power Supply	12V, 1A Power Adapter
Backup Battery	750mAh, Ni-MH AAA batteries x8
Backup Battery Life	72 hours*
Operating Temperature	-10°C to 45°C (14°F to 113°F)
Operating Humidity	Up to 85% non-condensing
Dimensions	105mm x 163mm x 30mm

*Note: Actual battery life may vary due to product settings, operating environment and usage.

Ordering Information

HWC-1	Hardwire to Wireless Converter
HWC-1B	Hardwire to Wireless Converter with backup battery