



RF-DGL-F1 RF Dongle

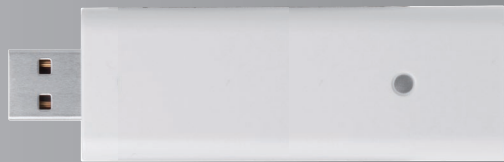

Climax RF Dongle enables any devices with USB serial port to be integrated into the network with the dongle via virtual COM port, USB to UART interface, providing easy compatibility solution for existing products.

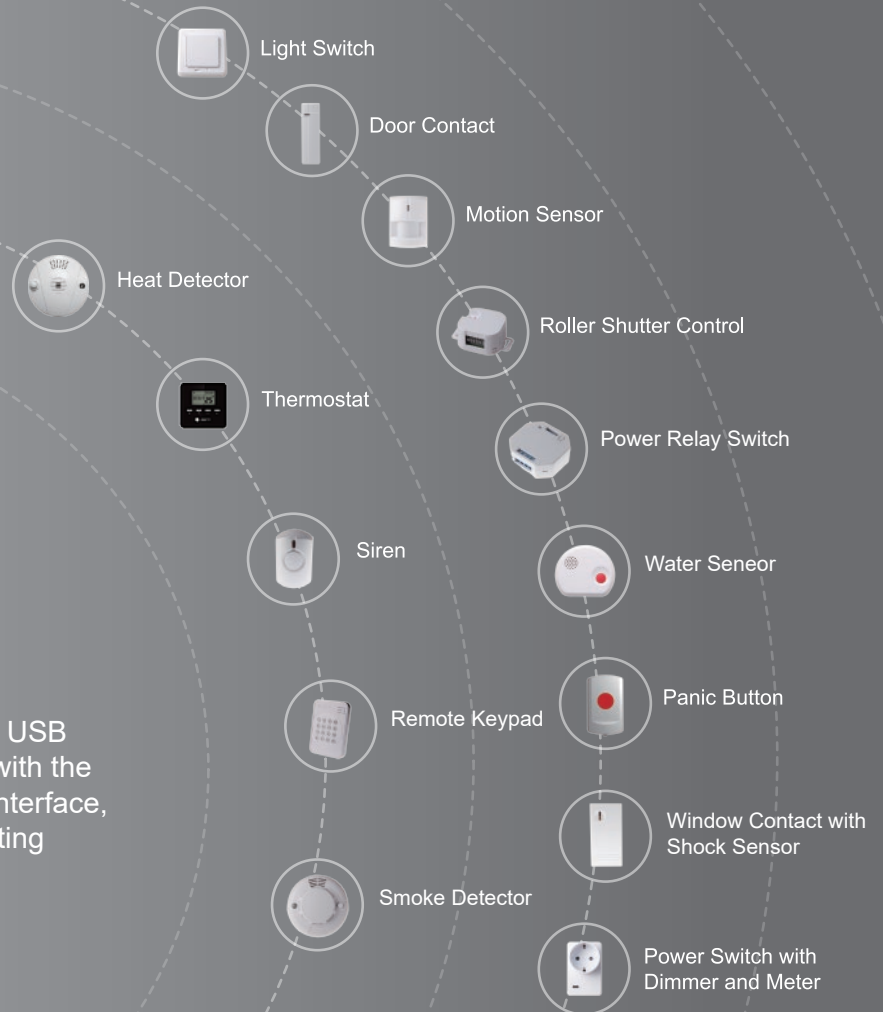

Features & Specifications

- Texas Instrument CC1120 SoC
- USB 2.0
- FTDI Virtual COM Port
- LED Indicator
- Frequencies: 868 / 869 / F1 433 / F1 868 / F1 869 / F1 919 MHz
- Output Power: 14 dBm
- RX Sensitivity: -114 dBm
- Data Rate: 10 kbit/s
- Range: 900 meters (outdoor)
- Operating Humidity: up to 85% non-condensing
- Operating Temperature: -10° to 50°C
- Dimension: 72 x 26 x 8.75 mm